


Purpose: Widely used for the mechanical parts of automobile fittings, fastening, chains, bearings and tools etc. to realize the continuous heat-treatment operations of automatic loading, carbonitriding, quenching, rinsing, tempering, dyeing and oil-covering etc. The computerizing office management can be realized with computer control system.

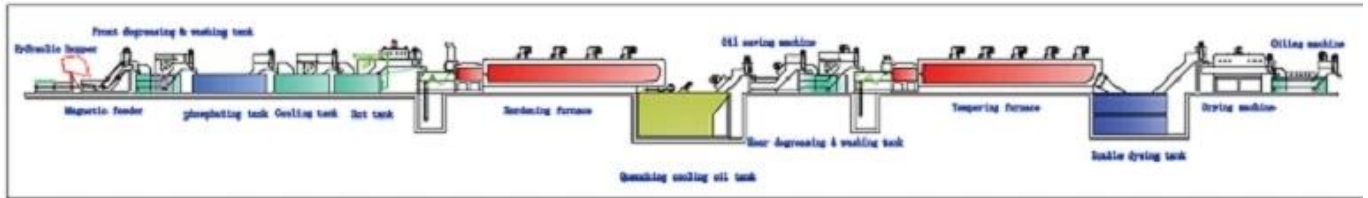

Continuous Mesh-belt Conveyor and Gas Controlled Heat-Treatment Furnace

Model	POWER(KW)	TOTAL POWER(KW)	Working Temp.(°C)	Working Dimension(mm)	CAPACITY(KGS/H)
RB-30*600*10	#1	90	950	300*6000*100	120-150
RB40*600*10	#2	120	950	400*6000*100	180-220
RB50*600*10	#3	180	950	500*6000*100	250-300
RB60*600*10	#4-1	220	950	600*6000*100	400-450
RB60*800*10	#4-2	275	950	600*8000*100	450-500
RB80*600*10	#5-1	275	950	800*6000*100	450-500
RB80*800*10	#5-2	360	950	800*8000*100	650-750
RB80*1000*10	#6	410	950	800*10000*100	900-1000
RB100*1000*10	#7	500	950	1000*10000*100	1200-1300
RB120*1000*10	#8	600	950	1200*10000*100	1400-1500
RB120*1350*10	#9	950	950	1200*13500*100	1800-2000