


Purpose: Widely used for the mechanical parts of automobile fittings, fastening, chains, bearings and tools etc. to realize the continuous heat-treatment operations of automatic loading, carbonitriding, quenching, rinsing, tempering, dyeing and oil-covering etc. The computerizing office management can be realized with computer control system.

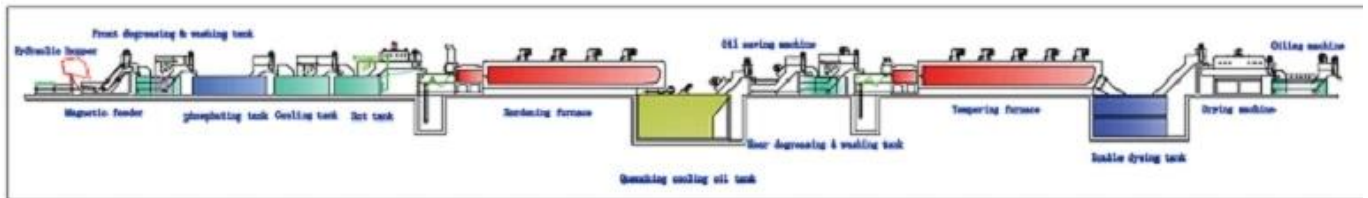

Specifications:

Model	POWER(KW)	TOTAL POWER(KW)	Working Temp. (°C)	Working Dimension(mm)	CAPACITY(KGS/H)
WZTG9-30*600*10	#1	90	950	300*6000*100	120-150
WZTG9-40*600*10	#2	120	950	400*6000*100	180-220
WZTG9-50*600*10	#3	180	950	500*6000*100	250-300
WZTG9-60*600*10	#4-1	220	950	600*6000*100	400-450
WZTG9-60*800*10	#4-2	275	950	600*8000*100	450-500
WZTG9-80*600*10	#5-1	275	950	800*6000*100	450-500
WZTG9-80*800*10	#5-2	360	950	800*8000*100	650-750
WZTG9-80*1000*10	#6	410	950	800*10000*100	900-1000
WZTG9-100*1000*10	#7	500	950	1000*10000*100	1200-1300
WZTG9-120*1000*10	#8	600	950	1200*10000*100	1400-1500
WZTG9-120*1350*10	#9	950	950	1200*13500*100	1800-2000

*SIZE & SPECIFICATION CAN BE CUSTOM MADE