


## Product Description



# SPRING WASHER MACHINE

Fast speed and high stability. High carbon steel with tensile strength of 1500–1700 can be used as material of spring washer.

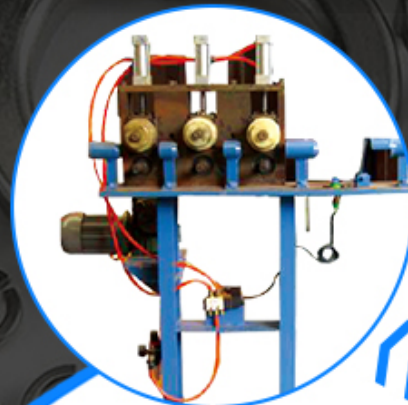

Coil collection



Belt wire drawing machine



Cutting machine



Coil machine

- Professional
- Good quality
- Energy conservation

# 20 YEARS

20 years of professional export

## High Speed Spring Washer making Machine

We can provide a whole line to make spring washer. The spring washer production line contains cutting machine, belt wire drawing machine, rolling up machine, coil collection machine.

spring washer machine it include three parts :  
1 step,drawing the round wire to belt wire machine.

2 step,rolling up machine.

3 step, cutting machine.

Technical parameter

# TECHNICAL SPECIFICATION

| Item   | Specification                          | Speed rpm | Dimension(L*W*H) mm | Weight/kg |
|--|--|-----------|---------------------|-----------|
| Belt Wire Drawing Machine                        | Reel dia.:550                          |           |                     |           |
|  | Reel dia.:350                          |           |                     |           |
| Coil machine                                     | 3-5mm(inner dia of final product)      | 1080      | 1380*600*950        | 400       |
|  | 6mm(inner dia of final product)        | 1080      | 1600*650*950        | 450       |
|  | 8-10mm(inner dia of final product)     | 720       | 1800*750*1350       | 750       |
|  | 12-16mm(inner dia of final product)    | 518       | 1800*750*1350       | 1000      |
|  | 18-22mm(inner dia of final product)    | 392       | 2000*1450*900       | 1200      |
|  | 24-30mm(inner dia of final product)    | 262       | 2200*1000*1500      | 1600      |
|  | Above 33mm(inner dia of final product) | 150       | 2600*1100*1780      | 2000      |
| Coil collection machine                          | Below 12mm(inner dia of final product) |           |                     |           |
|  | 12-22mm(inner dia of final product)    |           |                     |           |
| Cutting machine                                  | 3-5mm(inner dia of final product)      | 530       | 850*700*1250        | 300       |
|  | 6-8mm(inner dia of final product)      | 368       | 1200*750*1350       | 450       |
|  | 10-12mm(inner dia of final product)    | 296       | 1450*850*1500       | 600       |
|  | 14-16mm(inner dia of final product)    | 213       | 1550*950*1580       | 1000      |
|  | 18-20mm(inner dia of final product)    | 150       | 1650*1000*1600      | 1300      |
|  | 22-30mm(inner dia of final product)    | 120       | 1850*1200*1600      | 1500      |
|  | above33mm(inner dia of final product)  | 70        | 2000*1500*2800      | 3000      |
| Mould(round wire to belt wire) material Cr12Movz | 150mm                                  |           |                     |           |
|  | 200mm                                  |           |                     |           |
|  | 150mm mould sheet                      |           |                     |           |
|  | 200mm mould sheet                      |           |                     |           |

All specifications are subject to changes without prior notice

# Products Show