

Características de la máquina:

1. Estas máquinas de rumbo en frío son completamente automáticas y fáciles de operar con poco entrenamiento, equipadas con un troquel sólido para producir en blanco para pernos, tornillos, remaches y otros componentes similares. El mecanismo de corte y eliminación tiene dispositivos de forma segura que detendrán cualquier accidente importante si se produce alguna función anormal en las máquinas.
2. Se había hecho una disposición positiva en la primera y segunda punta para eliminar la posibilidad de que las piezas se pegan a estos golpes durante las operaciones.
3. En algunos cargos adicionales, las máquinas estarán equipadas con embrague neumático y sistemas de lubricaciones centralizadas automáticas que proporciona suficiente cantidad lubricante a toda la superficie del rodamiento.



PRODUCTION AREA


Provide You With A Variety Of Products Meet
The Different Needs Of Customers



Screw With Washer




Multi-stage
Special Shaped Screw

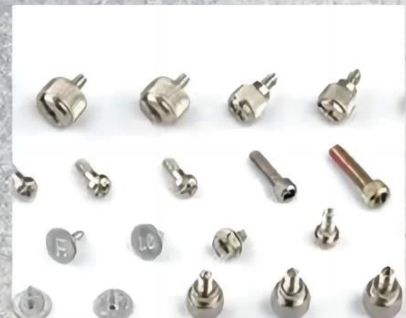

Flange Head Screw



Ordinary Screw

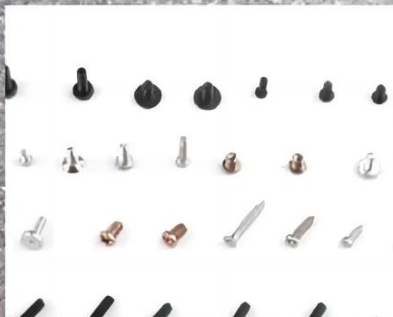


Miniature Screw






Semi-hollow Rivet

DETAILS SHOW

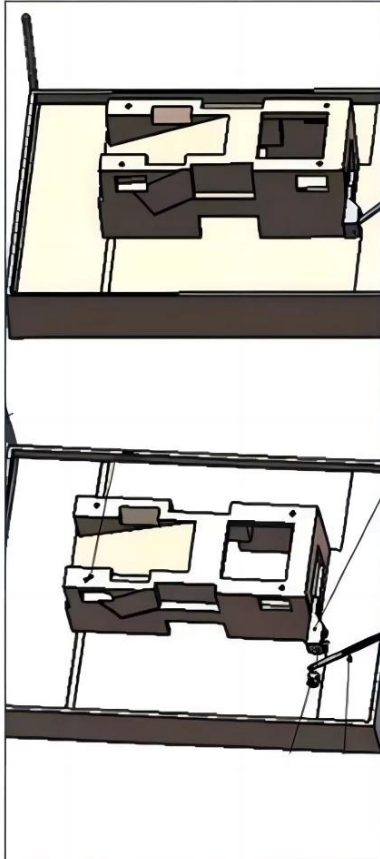

Heading machine is the fastener industry whole plant equipment with automatic thread rolling machine supporting the professional equipment cold heading machine.

Its purpose is selected, such as carbon steel, stainless steel, aluminum, copper and other metal wire, with a suitable mold, according to wire made allowable pressure ratio in effect under the slider crank rod driven,

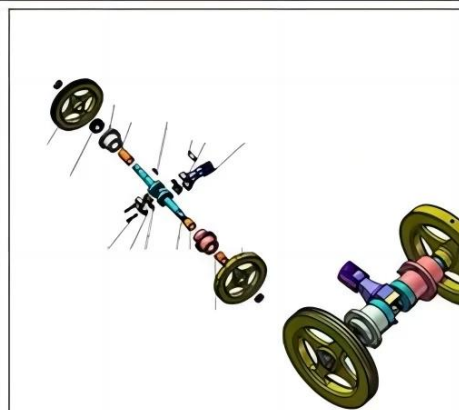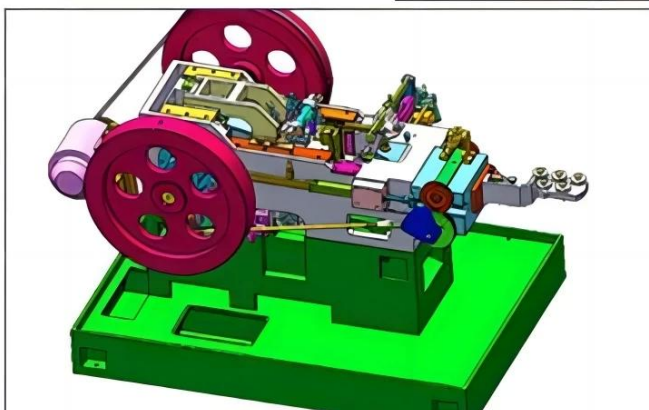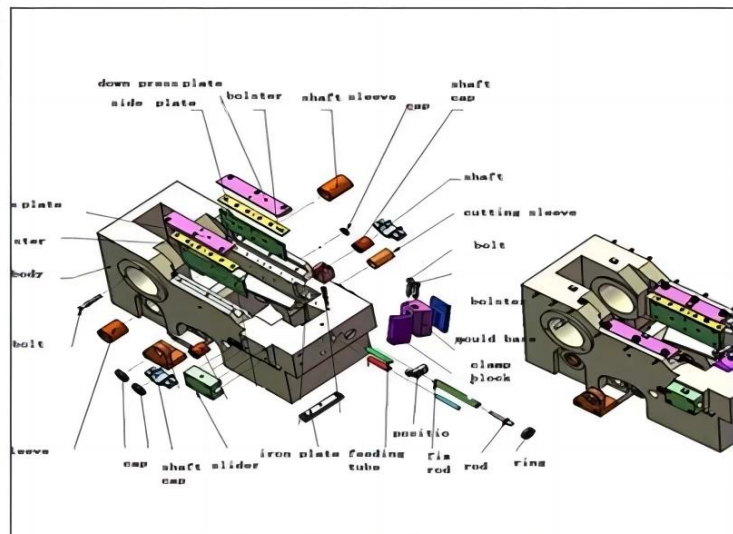

SAFETY INSTRUCTIONS

The head machine is a professional cold upsetting forming machine which is matched with automatic wire rolling machine in the whole plant of fastener industry.

Its purpose is to the selected such as carbon steel, stainless steel, aluminum, copper and other metal wire, with appropriate mould, according to the allowable pressure wire than, under the effect of crank-shaft connecting rod drive the slider, automated, fast after the required size of the wire will be automatically shear, extrusion in the mould for needed fastener head type, stem diameter, facilitate thread rolling, or become a qualified rivet type fastener. The heading machine automatically processes the wire into semi-finished products.



- 1 marco del cuerpo está hecho de soldadura de placa de hierro
- Se hacen 2 piezas de repuesto de fundición
- 3 piezas interiores están hechas de acero de rodamiento



SCREW MAKER

One die two blow heading machine. widely used to produce standard and non-standard screw. the machine is easy to operate and stable in performance



PRODUCTION AREA


Provide You With A Variety Of Products Meet
The Different Needs Of Customers



Screw With Washer




Multi-stage
Special Shaped Screw

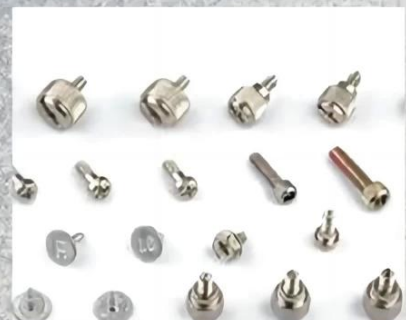

Flange Head Screw



Ordinary Screw

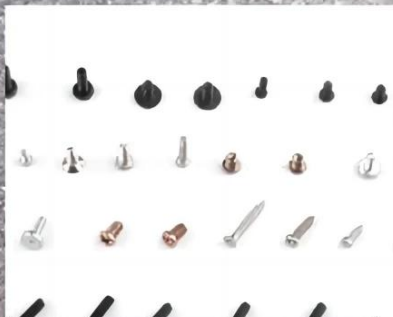


Miniature Screw






Semi-hollow Rivet

DETAILS SHOW

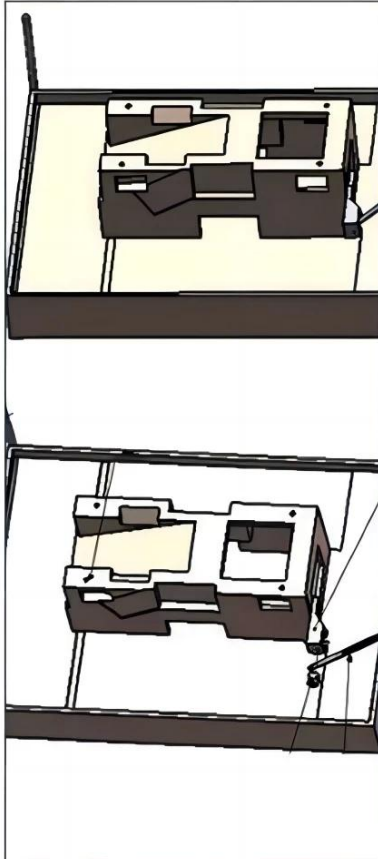

Heading machine is the fastener industry whole plant equipment with automatic thread rolling machine supporting the professional equipment cold heading machine.

Its purpose is selected, such as carbon steel, stainless steel, aluminum, copper and other metal wire, with a suitable mold, according to wire made allowable pressure ratio in effect under the slider crank rod driven,

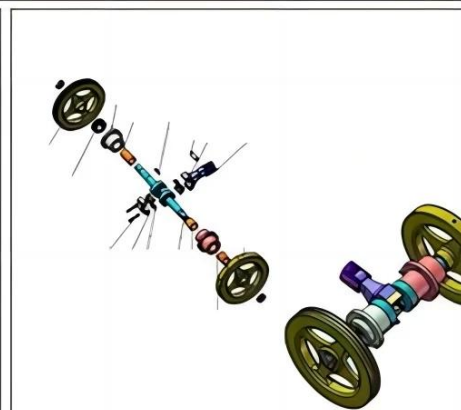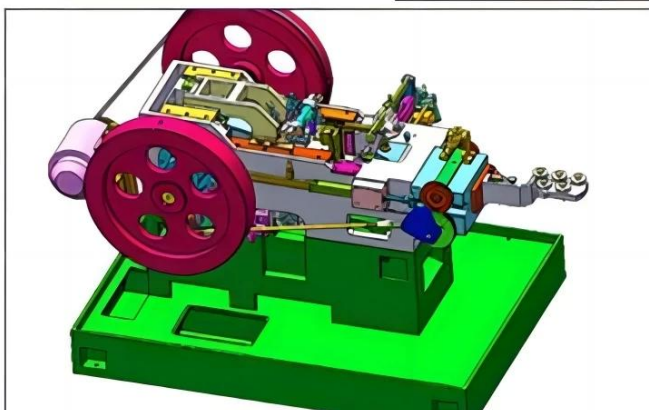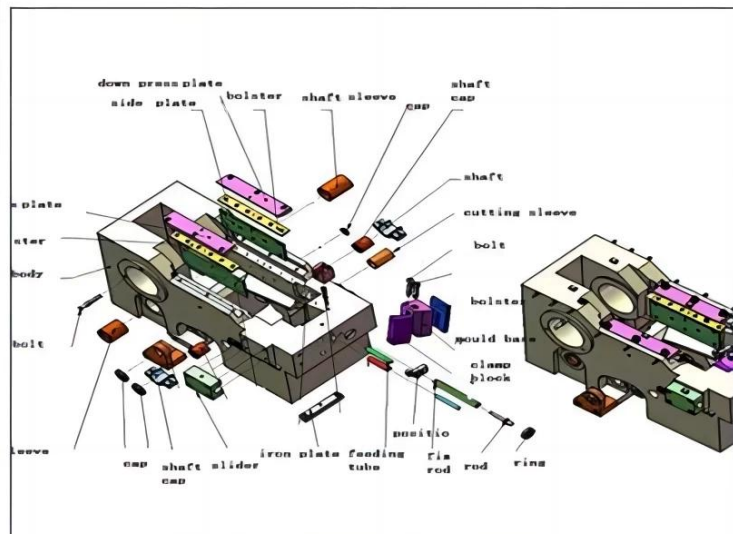

SAFETY INSTRUCTIONS

The head machine is a professional cold upsetting forming machine which is matched with automatic wire rolling machine in the whole plant of fastener industry.

Its purpose is to the selected such as carbon steel, stainless steel, aluminum, copper and other metal wire, with appropriate mould, according to the allowable pressure wire than, under the effect of crank-shaft connecting rod drive the slider, automated, fast after the required size of the wire will be automatically shear, extrusion in the mould for needed fastener head type, stem diameter, facilitate thread rolling, or become a qualified rivet type fastener. The heading machine automatically processes the wire into semi-finished products.

