

Machine Introduction

Bi-metal Composite Contact Cold Header can make six different metals be compounded together under cold state to produce composite contacts according to the technique requirements. Its working process includes the following steps: Sending two different kinds of metal wire into the machine firstly, transmitting them into the mould after being cut off. Then by two times upsetting process, the two kinds of metal become the composite contacts. Finally, the products retreat from the mould and enter into the finished product box.

Application

MICRO SWITCH MANUFACTURERS
AUXILIARY SWITCH MANUFACTURERS
ROTARY SWITCH MANUFACTURERS
LIMIT SWITCH MANUFACTURERS
KNIFE SWITCH MANUFACTURERS
ROCKER SWITCH MANUFACTURERS
DOMESTIC SWITCH MANUFACTURERS
AUTOMOTIVE SWITCH MANUFACTURERS
RELAYS MANUFACTURERS
MOTOR STARTER
SWITCH GEARS MANUFACTURES
AUTOMOTIVE MANUFACTURES
AVIATION MANUFACTURES
APPLIANCES MANUFACTURES


Typical alloys include:

Silver
Fine grained silver
Silver-Nickel
Silver-Iron
Silver-Graphite
Silver-Cadmium Oxide
Silver-Tin Oxide
Gold
Platinum
Palladium

Exhibition Abroad:

16

HARBIN RAINBOW TECHNOLOGY CO.,LTD

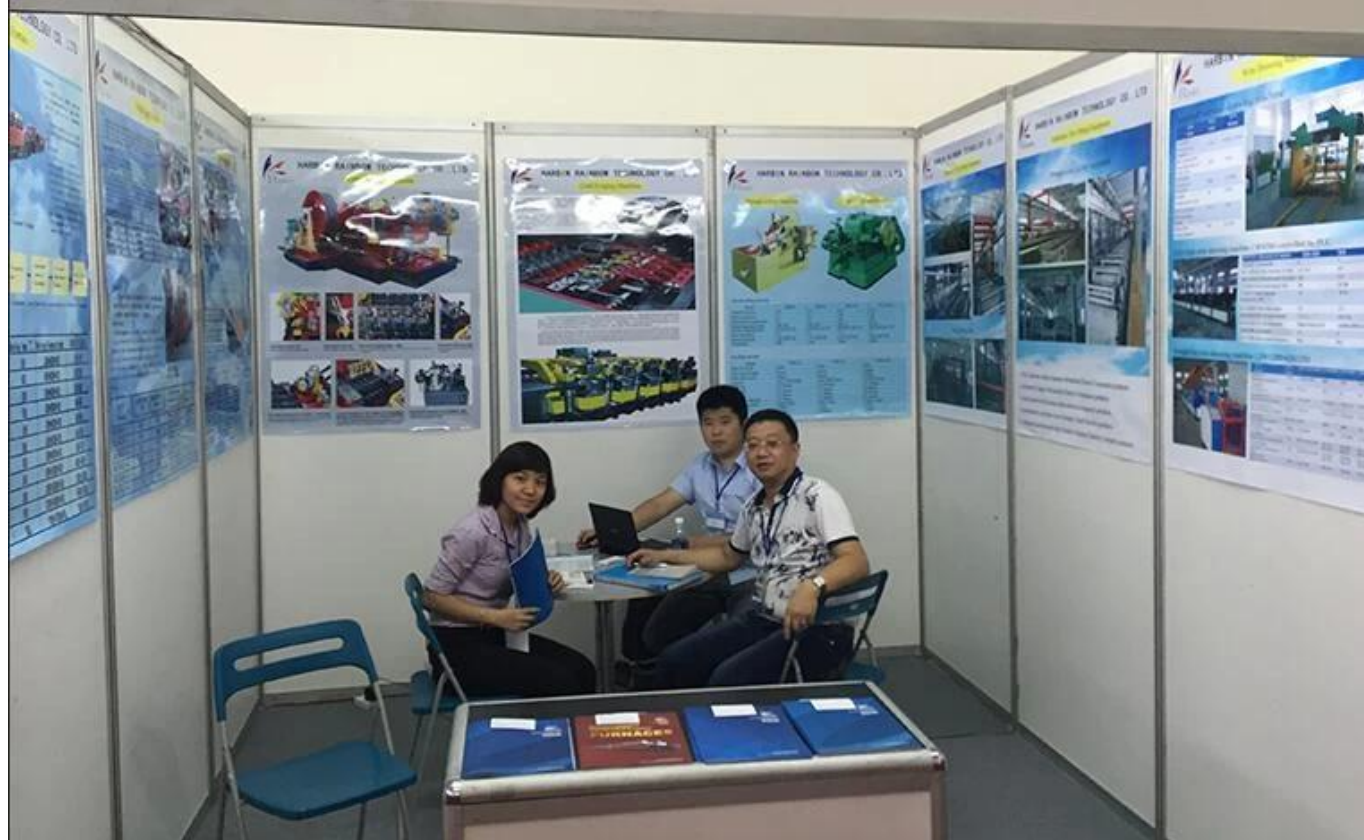





For more information, please visit our website:www.rainbowtechnology.net
Have any questions, please feel free to contact me.