WELL TYPE ELECTRIC ANNEALING FURNACE

Well Type Electric Annealing Furnace





Liner of Well Type Electric Annealing Furnace



Well Type Electric Annealing Furnace (Main Furnace)



Application: Mainly applied in spheroidizing annealing for wire coil of low-carbon steel, alloy steel,

and bearing steel.


It meets the deep processing requirement of the mechanical properties of steel after heatment. It acquires non-oxidation decarbonization, spheroidizing tissue uniformity and good quality of cold plastic deformation (such as stamping and cold forging).

Well type structure can be buried underground, so it occupies small area; it adopts electrical heating and automatic heatment process.

The furnace lining adopts full fibre, heat efficiency and energy conservation highly promoted. The furnace top is equipped with strong convection blower

so the temperature uniformity of whole furnace is $good.(+-5^{\circ}C)$; adopting protective gas and non-oxidation heatment to reduce metal loss; feeding material is convenient.

Above loadage is for iron wire for your reference. The loadage changes according to Dia, Height and Weight of iron wire.

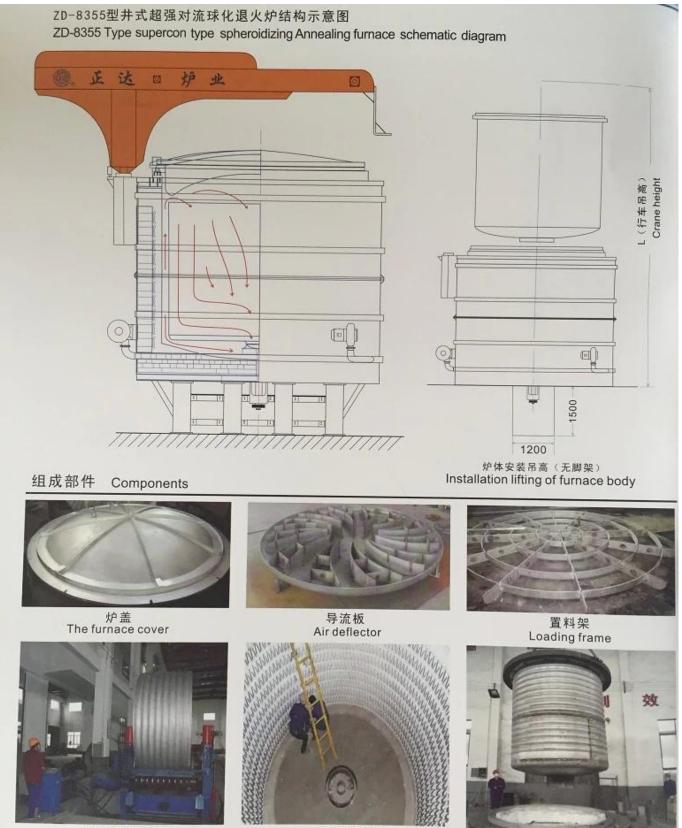

波纹桶成型 Corrugated molding

电加热炉 Electric heating furnace

波纹桶 Corrugated bucket



用于标准件行业球化炉 Used for fastner industry



用于五金工具行业球化炉 Used for the hardware tool industry

超强对流型并式球化退火炉相关尺寸一览表(电加热型) (Electric heating)



用于汽配行业球化炉 Used for the auto parts industry



用于轴承行业球化炉 Used for the bearing industry

单位: mm

		使用高度	か体外径 Fumace body diameter		Total	脚架高 Tripod height	行车吊高 Crane height		地坑尺寸 Pit size	维修坑尺寸 Repair pit size	炉体总重 Furnace weight	行车荷重 Driving Ibad	1000	装载量 Capacit
						F	有 脚 Hars Buggatting	无脚 No	G×J	长×宽×深 Lenght×Width×Height	(吨) Ton	(吨) Ton	(千瓦) Kw	(単) Ton
		-	3378	3200	6930	1500	7800	6300	5200×5200	5200×1200×1500	19.8	5	240	2~8
-8355-1	2200	2000		4200	7930	1500	8800	7300	5200×5200	5200×1200×1500	22.8	5	240	2~8
	2200	3000	3378	3200	6930	1500	7800	6300	5450×5200	5450×1200×1500	21.8	5	280	4~14
8355-2	2450	2000	3678		7930	1500	8800	7300	5450×5200	5450×1200×1500	25.8	5	280	4~14
	2450	3000	3678	4200	100000000	120312030	7800	a second second	5800×5800	5800×1200×1500	26.2	5	400	4~14
-8355-3	2800	2000	3978	3200	6930	1500				5800×1200×1500	28.5	5	400	8~16
	2800	3000	3978	4200	7930	1500	8800	100000		6200×1200×1500	29.3	10	500	8~22
8355-4	3200	2000	4378	3200	6930	1500	7800				32.5	10	500	8-22
	-		4378	4200	7930	1500	9800			6200×1200×1500		10	640	8~32
	3200	3000		3200	6930	1500	8050	6550	6500×6500	6500×1200×1500	34.3		-	1000000000
8355-5	3600	2000	4778		7930	1500	9950	8450	6500×6500	6500×1200×1500	35.2	10	640	8~32
	3600	3000	4778	4200	11111111111		8050			6700×1200×1500	35.3	10	720	8~36
8355-6	3700	2000	4978	3200	6930	1500				6700×1200×1500		10	720	8~36
	3700	3000	4978	4200	7930	1500	9990	8450	0100 100					

×

For more information, please visit our website: www.rainbowtechnology.net Have any questions, please feel free to contact me. Best wishes,

Vera

WhatsApp is: 8618704610523 We chat: vera5266 QQ: 417651303