

La macchina per il rolling del filo adotta due piastre di rotolamento del filo del filo sfalsata 1/2 Design della distanza a vite, una piastra è fissa, la piastra mobile è sulla piastra fissa fare il movimento della linea retta avanti e indietro, quando il pezzo di lavoro si nutre tra due piastre, la piastra mobile sposta il pezzo di rottura in avanti, rendere la sua deformazione in plastica di superficie nel filo. Per rotolare il filo su gambo bianco di bullone dopo essere stato a freddo.

**RAINBOW**

# HIGH-SPEED AUTOMATIC THREAD ROLLING MACHINE



- Professional ✓
- Good quality ✓
- Energy conservation ✓

**20** YEARS

20 years of professional export

# PRODUCT DISPLAY

Various types of thread rolling machine to meet your various needs



CY06Z



CY08Z



CY10Z



CY12Z



CY16Z



CY30Z



CY02X



CY05X



CY06XN



CY06X



CY08X



CY12X



# THREAD ROLLING MACHINE PART OF THE STRUCTURE



## TRANSPORTATION MATERIAL

Sloping filling-90 degree obliquity with main slider



## TRANSPORTATION MATERIAL

Sloping filling-30 degree obliquity with main slider



## NO HEAD SCREW

Through no head screw feeding system, the system solves problems in no head 'screw bottleneck with advanced value Ir machinery.




## ORBITAL BRACKET

To stabilize filling progress in order to avoid floating head and increase fine quality.



## FORCIBLE OIL CARRYING

It replaces traditional acrylic oiler which damaged main slider. This precision filter system not only lowers direct cost in production but also extends life usage in recycle.

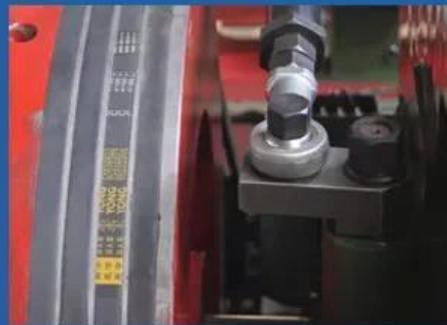

## AUTO FEEDING SYSTEM

Replaced cam by auto feed system, effectively avoids the cam abrasion in the production process.